


QL-11C load cells are available in the capacities from 3kg to 100kg.

Alloy aluminum construction with parallel beam type.

Silicon adhesive sealed, surface anodized and anti-corrosion.

Integral structure and easy installation.

Suitable for electronic counting scales, platform scales, electronic balance and other electronic weighing devices.

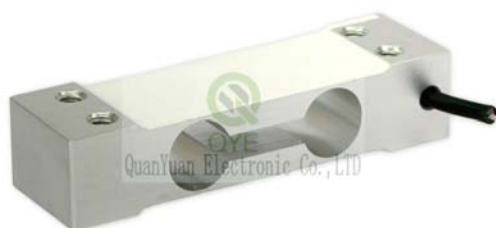

Features:

Capacity : 3-100kg

Defend grade: IP65


High accuracy.

Alloy aluminum parallel beam

Max. platform size: 250x350mm

Integral structure, reliable performance, and easy installation.

Electrical connection and Dimensions:

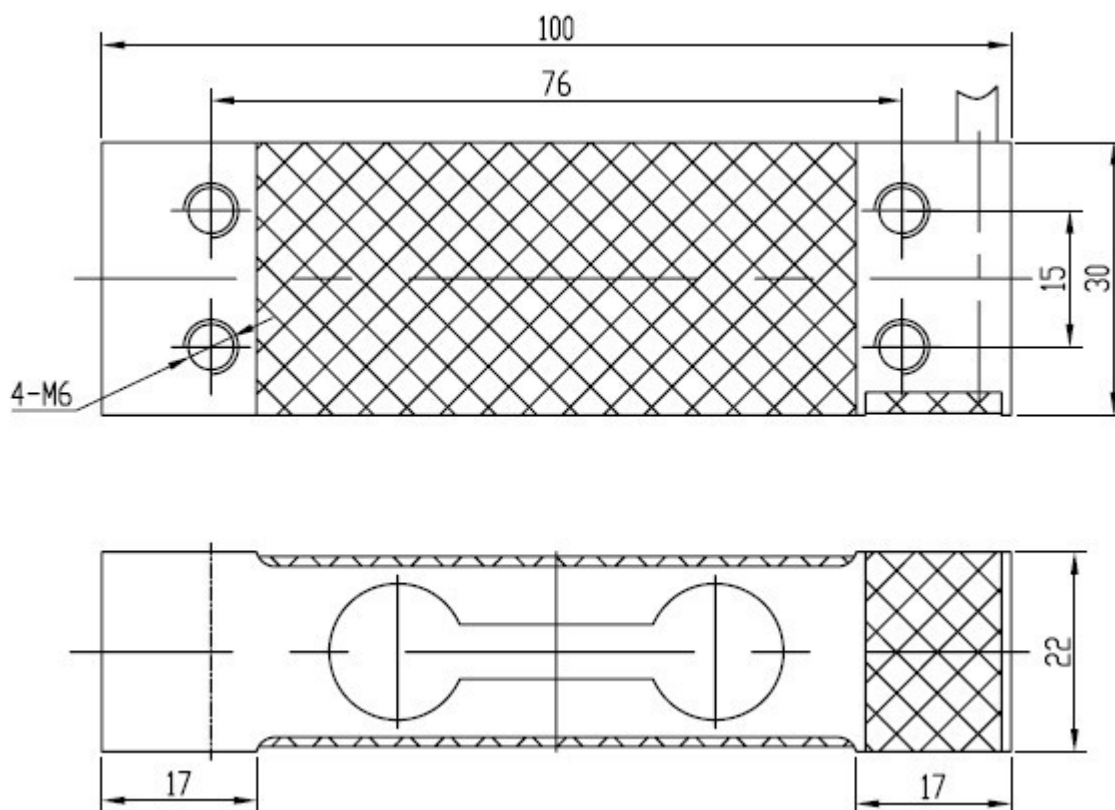

QY Electronic Co Ltd

Address: No. 1032, Xingnan Road, Hantai District, Hanzhong, Shaanxi, China (Mainland)

Website: www.qysensor.com

TEL: +86-0916-2257989

E-mail: info@qysensor.com

Zip: 723000

Technical Specifications

Specifications:		
capacity	kg	3, 10,20,30,50,80,100
safe overload	%FS	120
ultimate overload	%FS	150
rated output	mV/V	2.0 ± 0.2
excitation voltage	Vdc	9 ~ 12
combined error	%FS	± 0.02
zero unbalance	%FS	± 2
non-linearity	%FS	± 0.02
hysteresis	%FS	± 0.02
repeatability	%FS	± 0.01
creep	%FS/30min	± 0.02
input resistance	Ω	406 ± 10
output resistance	Ω	350 ± 3
insulation resistance	M Ω	$\geq 5000 @ 50 \text{ Vdc}$
operating temperature range	$^{\circ}\text{C}$	-20 ~ +60
compensated temperature range	$^{\circ}\text{C}$	-10 ~ +40
temperature coefficient of SPAN	%FS/10 $^{\circ}\text{C}$	± 0.02
temperature coefficient of ZERO	%FS/10 $^{\circ}\text{C}$	± 0.03

Electrical connection:

Excitation+ red Excitation- black Signal+ green Signal- white

Four-core shielded cable with polyethylene. Cable is not connected with elastomer.

Cable length: 0.42 m

Cable diameter : $4 \pm 0.2 \text{ mm}$

The cable length could be chose by customer's application.